

Fire Doors

Classic-Craft®, Fiber-Classic®, Smooth-Star® & Steel

The phrase
“safety first” is more
than just a saying. It’s
our standard.

From smooth to wood-grained, we have products to meet most national and local code requirements for house-to-garage, multi-family residential and hotel / motel unit entries.*



Adjusta-Fit® 2 Frame



Using the right frame is critical in any top-quality door installation, and never more so than with Fire-rated products. Therma-Tru Adjusta-Fit 2 frame technology helps ensure an optimum fit and long-lasting performance. The frames are constructed with a commercial-grade, 18-gauge base frame; galvanized steel and factory-coated paint finish; and an all-aluminum, thermally broken threshold. These features make them ideal for interior and exterior applications, including corridor openings and outside unit entries.

Therma-Tru® Adjusta-Fit 2 frames also feature these key benefits:


- 90-Minute positive-pressure Fire-rating, third-party certified by Intertek, Warnock-Hersey.
- Standard 4-7/8" ANSI 115.1, or 2-3/4" T-lip strike prep option.
- Choice of standard, public access or no-sill options.
- Minimum 22-gauge closure with 1" of adjustability, suitable for walls from 4"-9-1/2" deep.

*To confirm fire door requirements in your jurisdiction, always check with your local building code authority. Note: To see the full results of third-party Intertek, Warnock-Hersey testing, visit www.thermatru.com/performance.

90-Minute Fire-Rated Steel Edge

Therma-Tru's TR 12-24 Steel Edge 90-Minute Fire-rated doors and door systems provide outstanding protection. Constructed with 24-gauge steel edges and tested to withstand at least 90 minutes of fire exposure at temperatures that reach more than 1,700 degrees Fahrenheit, the doors are perfect for multi-family living and house-to-garage projects. Available in a variety of door styles, sizes and lock preparations, the units are suitable for a minimum 4" wall depth or greater. Therma-Tru also offers all the necessary components – frame, weatherstrip, bottom sweep and sill – to complete a 90-Minute Fire-rated door system.

6 WBDR / HVHZ Options: Look for this icon to find door styles that can be configured for WBDR or HVHZ in an Adjusta-Fit. 2 frame.*



SE100
 6
 2'0" x 6'8"
 2'4" x 6'8"
 2'6" x 6'8"
 2'8" x 6'8"
 2'10" x 6'8"
 3'0" x 6'8"
 3'6" x 6'8" ‡



SE210HD
 6
 2'6" x 6'8"
 2'8" x 6'8" ‡
 2'10" x 6'8"
 3'0" x 6'8" ‡



SE514
 6
 2'8" x 6'8" ‡
 2'10" x 6'8" ‡
 3'0" x 6'8" ‡



SE978HD
 6
 2'8" x 6'8" ‡
 2'10" x 6'8" ‡
 3'0" x 6'8" ‡



SE969HD
 6
 2'8" x 6'8"
 2'10" x 6'8"
 3'0" x 6'8"



SE1005HD
 6
 2'8" x 6'8"
 2'10" x 6'8"
 3'0" x 6'8"

20-Minute Fire-Rated Wood Edge

Therma-Tru offers a wide variety of stylish 20-Minute Fire-rated fiberglass doors. Most Therma-Tru solid-panel wood-edge fiberglass doors can be ordered as 20-Minute Fire-rated product. Solid-panel wood-edge steel doors in select sizes can be ordered with the 20-Minute Fire-rated label. The doors are tested to withstand a minimum of 20 minutes of fire exposure at temperatures that reach more than 1,400 degrees Fahrenheit, and are certified and approved for use with mortise locks.

6 WBDR / HVHZ Options: Look for this icon to find door styles that can be configured for WBDR or HVHZ in a Therma-Tru-specified wood frame.*

Classic-Craft. Mahogany Collection™



CCMF890
 3'0" x 8'0"



CCMF060
 3'0" x 6'8"



CCMF701
 3'0" x 6'8"

Classic-Craft *Continues on next page.*

*Please verify that there is a Therma-Tru Impact-rated product approval for the configuration before buying.

Note: To see the full results of third-party Intertek, Warnock-Hersey testing, visit www.thermatru.com/performance. See your Therma-Tru seller or visit www.thermatru.com for details on limited warranties and exclusions. See Full-Line Catalog for important product details that may help with your purchase decision.

Left Page: Smooth-Star door – SSF120

Key

- No Stile Lines
- WBDR Options
- ‡ 7'0" Height Available

Rustic Collection™



CCRF205
3'0" x 6'8" | CCRF8205
3'0" x 8'0"

CCRF8225
3'0" x 8'0"

CCRF8005
3'0" x 8'0"

CCRF040 | CCRF8040
3'0" x 6'8" | 3'0" x 8'0"

CCRF8222
3'0" x 8'0"



CCRF200 | CCRF8200
3'0" x 6'8" | 3'0" x 8'0"

CCRF8220
3'0" x 8'0"

Oak Collection™



CCF91
3'0" x 6'8"

CCF831
3'0" x 8'0"

CCF810
3'0" x 8'0"

CCF060
2'8" x 6'8"
3'0" x 6'8"

Canvas Collection®



CCVF400
3'0" x 6'8"

CCVF205 | CCVF8205
3'0" x 6'8" | 3'0" x 8'0"

CCVF220 | CCVF8220
3'0" x 6'8" | 3'0" x 8'0"

CCVF200
3'0" x 6'8"

CCVF060 | CCVF8060
3'0" x 6'8" | 3'0" x 8'0"



CCVF831
3'0" x 8'0"



CCVF050
3'0" x 6'8"

Fiber-Classic[®] Mahogany Collection[™]



FMF31
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"



FMF220
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"



FMF205
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"



FMF755
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"



FMF600
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"



FMF134
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"



FMF60
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"



FMF860
2'8" x 8'0"
3'0" x 8'0"

Oak Collection[™]



FMF100
2'6" x 6'8"
2'8" x 6'8" ‡
2'10" x 6'8" ‡
3'0" x 6'8" ‡

FMF8100
2'6" x 8'0"
2'8" x 8'0"
2'10" x 8'0"
3'0" x 8'0"



FCF31
2'8" x 6'8"
3'0" x 6'8"



FCF809
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"



FCF862
2'8" x 8'0"
2'10" x 8'0"
3'0" x 8'0"



FCF808
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"



FCF755
2'8" x 6'8"
3'0" x 6'8"



FCF134
2'8" x 6'8"
3'0" x 6'8"

Fiber-Classic *Continues on next page.*

Key

- No Stile Lines
- 6 WBDR Options
- ‡ 7'0" Height Available



FCF160*

6
2'6" x 6'8"
2'8" x 6'8" ‡
2'10" x 6'8" ‡
3'0" x 6'8" ‡

FCF8160

6
2'8" x 8'0"
2'10" x 8'0"
3'0" x 8'0"




FCF100

6
2'6" x 6'8"
2'8" x 6'8" ‡
2'10" x 6'8" ‡
3'0" x 6'8" ‡

FCF8100

6
2'6" x 8'0"
2'8" x 8'0"
2'10" x 8'0"
3'0" x 8'0"

Smooth-Star.

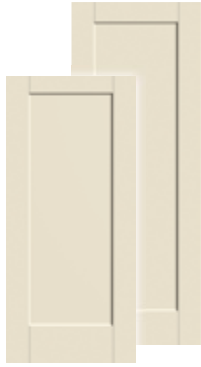

SSF1100

6
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"

SSF81100

6
2'8" x 8'0"
2'10" x 8'0"
3'0" x 8'0"



SSF93

6
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"



SSF120

6
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"

SSF8120

6
2'8" x 8'0"
2'10" x 8'0"
3'0" x 8'0"



SSF220*

6
2'8" x 6'8" ‡
2'10" x 6'8" ‡
3'0" x 6'8" ‡

SSF8220

6
2'8" x 8'0"
2'10" x 8'0"
3'0" x 8'0"



SSF200

6
2'6" x 6'8"
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"

SSF8200

6
2'8" x 8'0"
2'10" x 8'0"
3'0" x 8'0"



SSF205

6
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"

SSF8205

6
2'8" x 8'0"
2'10" x 8'0"
3'0" x 8'0"



SSF31

6
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"

SSF831

6
2'8" x 8'0"
2'10" x 8'0"
3'0" x 8'0"




SSF960

6
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"



SSF755

6
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"

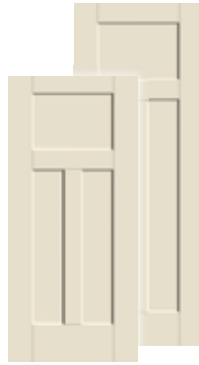


SSF4800

6
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"

SSF84800

6
2'8" x 8'0"
2'10" x 8'0"
3'0" x 8'0"

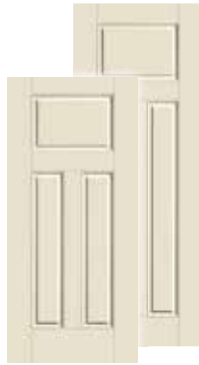

SSF600

6
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"

SSF8600

6
2'8" x 8'0"
2'10" x 8'0"
3'0" x 8'0"



SSF11

6
2'8" x 6'8"
2'10" x 6'8"
3'0" x 6'8"

*Select sizes available with elevated 10" bottom rail.

Note: See Full-Line Catalog for important product details that may help with your purchase decision.



SSF160* ■ 6 2'6" x 6'8" 2'8" x 6'8" ‡ 2'10" x 6'8" ‡ 3'0" x 6'8" ‡	SSF8160 6 2'6" x 8'0" 2'8" x 8'0" 2'10" x 8'0" ‡ 3'0" x 8'0"	SSF100 ■ 6 2'0" x 6'8" 2'6" x 6'8" 2'8" x 6'8" ‡ 2'10" x 6'8" ‡ 3'0" x 6'8" ‡	SSF8100 ■ 6 2'6" x 8'0" 2'8" x 8'0" 2'10" x 8'0" ‡ 3'0" x 8'0"
-------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------

Profiles™



969HD ■ 6 2'8" x 6'8" 2'10" x 6'8" 3'0" x 6'8"	978HD ■ 6 2'8" x 6'8" 2'10" x 6'8" 3'0" x 6'8"	1005HD ■ 6 2'8" x 6'8" 2'10" x 6'8" 3'0" x 6'8"	205HD ■ 6 2'8" x 6'8" 2'10" x 6'8" 3'0" x 6'8"	203HD ■ 6 2'8" x 6'8" 2'10" x 6'8" 3'0" x 6'8"	210HD ■ 6 2'6" x 6'8" ‡ 2'8" x 6'8" ‡ 2'10" x 6'8" ‡ 3'0" x 6'8" ‡	100 ■ 6 2'0" x 6'8" 2'4" x 6'8" 2'6" x 6'8" ‡ 2'8" x 6'8" ‡ 2'10" x 6'8" ‡ 3'0" x 6'8" ‡ 3'6" x 6'8"
--------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Traditions



TS214 ■ 6 2'8" x 6'8" 2'10" x 6'8" 3'0" x 6'8"	TS210 ■ 6 2'6" x 6'8" 2'8" x 6'8" 2'10" x 6'8" 3'0" x 6'8"	TS100 ■ 6 2'0" x 6'8" 2'4" x 6'8" ⚠ 2'6" x 6'8" 2'8" x 6'8" 2'10" x 6'8" ⚠ 3'0" x 6'8"
--------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Key

- No Stile Lines
- 6 WBDR Options
- 6 WBDR / HVHZ Options
- ⚠ 6'6" Height Available
- ‡ 7'0" Height Available